

BuyBoard Quote**ASSOCIATED SUPPLY COMPANY, INC.**

THE FOLLOWING DETAILS SHALL BE PROVIDED WITH ANY BUYBOARD PURCHASE ORDER (FAX PURCHASE ORDER TO 800-211-5454)

BuyBoard Vendor: Associated Supply Company, Inc.Phone: 512-255-7871
Fax: 512-255-0332Government Agency: City of Lago VistaShip To: City of Lago VistaPrepared By: Chase MartinMobile: 512-461-9749Email: cmartin@ascoeq.comDate Prepared: 5/14/2025Contacts' Name: Jose MunozEmail: Jose.Munoz@lagovistatexas.govProduct Description: 72" Construction Brush Grapple

I. Price List Dated: _____

II: Base Bid Options (Itemized Below)

BuyBoard Contract: 685-22Base Price: \$ 6,355.00

Hoses & Fittings

Included

SUB-TOTAL: \$ -Options List Price Total: \$ -
\$ 6,355.00

III. SUB-TOTAL OF I & II

IV. BuyBoard Discount: 12.00% \$ 762.60BUYBOARD CONTRACT PRICE: \$ 5,592.40

V: NON-BASE OPTIONS

Non-Base Options (%) = 0LOCAL DELIVERY \$ 165.00
PDI / Make Ready \$ 250.00\$ -
\$ -
\$ -SUB-TOTAL: \$ 415.00SUB-TOTAL: \$ -

VI: UNPUBLISHED OPTIONS ADDED TO CONTRACT PRICE (SUBTOTAL OF COL1 & COL 2)

\$ 415.00

VII: TOTAL IV + VI

\$ 6,007.40VIII: QUANTITY ORDERED UNITS: 1\$ 6,007.40IX: TRADE-IN OR OTHER CREDIT(S): \$ 7.40 ASCO one time special discount\$ 7.40TOTAL: \$ 6,000.00

FAX ALL PURCHASE ORDERS TO BUYBOARD AT 800-211-5454



GRAPPI FS

A dark, triangular background image showing a dense thicket of bare tree branches, suggesting a forest or scrubland environment.

**Selection,
Innovation,
Performance**

BRUSH GRAPPLES



- 6" tine spacing
- Standard cylinder guards protect all cylinder components
- 1 1/4" cylinder pivot pins
- 1 1/4" x 24" patented grapple pins greatly reduce torsional force
- 3/8" end plates on Utility Grapple 1/2" end plates on Construction Grapple
- Patented cushioned and sleeved cylinders are 2" x 8" x 1 1/4"
- Standard load check valve
- 100,000 PSI yield strength tine material

| SPECIFICATIONS | UTILITY BRUSH GRAPPLE | | | CONSTRUCTION BRUSH GRAPPLE | | | |
|-------------------|-----------------------|-------------|------------|----------------------------|------------|------------|------------|
| | 12260-0022 | 122266-0022 | 12272-0022 | 11372-0022 | 11378-0022 | 11384-0022 | 11390-0022 |
| A. Overall Width | 60.75" | 66.75" | 72.75" | 73" | 79" | 85" | 91" |
| B. Grapple Open | 33" | 33" | 33" | 40" | 40" | 40" | 40" |
| C. Grapple Closed | 17.375" | 17.375" | 17.375" | 16.5" | 16.5" | 16.5" | 16.5" |
| D. Overall Depth | 36" | 36" | 36" | 39" | 39" | 39" | 39" |
| Weight | 723 lbs | 740 lbs | 775 lbs | 925 lbs | 999 lbs | 1054 lbs | 1105 lbs |
| Number of Tines | 11 | 12 | 14 | 14 | 14 | 16 | 16 |



IMPORTANT: All replacement hydraulic hoses and fittings must have a minimum rated working pressure of 4000 psi.

***NOTE:** When ordering new Grapples you must also order the appropriate hose kit.
The new Grapples will not automatically ship with hoses.

Carrier Specifications:
lift capacities **Utility** **Construction**
<4,000 lbs **<5,000 lbs**
operating weight **<6,500 lbs** **<9,500 lbs**

Hose Kit Part Numbers

| 60" | 80" | 88" |
|--------------|--------------|--------------|
| MTG1113-0022 | MTG1113-0903 | MTG1113-9783 |

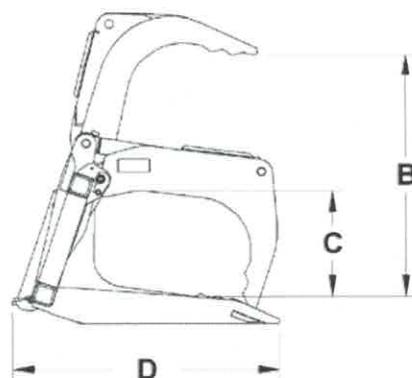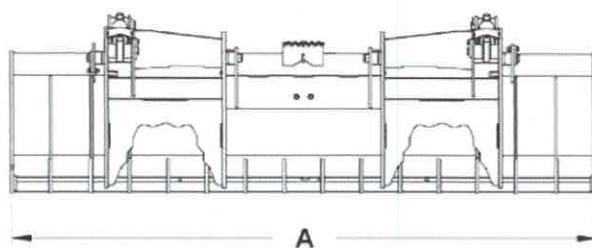

SCRAP GRAPPLES

- Standard cylinder guards protect all cylinder components
- Standard load check valve
- 1 1/4" cylinder pivot pins
- 1 1/4" x 24" patented grapple pins reduce torsional force
- Patented cushioned cylinders are 2" x 8" x 1 1/4" on full feature
- Bucket edge drilled for FFC® replaceable edge unless specified
- Optional 3/4" x 8" double beveled edge



| SPECIFICATIONS | UTILITY SCRAP GRAPPLE | | | CONSTRUCTION SCRAP GRAPPLE | | |
|------------------------------------|-----------------------|------------|------------|----------------------------|------------|------------|
| | 12860-0022 | 12866-0022 | 12872-0022 | 11876-0022 | 11882-0022 | 11888-0022 |
| A. Overall Width | 60.75" | 66.75" | 72.75" | 76" | 82" | 88" |
| B. Overall Height - Grapple Open | 34" | 34" | 34" | 40" | 40" | 40" |
| C. Overall Height - Grapple Closed | 19.75" | 19.75" | 19.75" | 20" | 20" | 20" |
| D. Overall Depth | 36" | 36" | 36" | 38" | 38" | 38" |
| Weight | 738 lbs | 788 lbs | 835 lbs | 1081 lbs | 1133 lbs | 1180 lbs |
| Number of Tines | 11 | 12 | 14 | 14 | 14 | 16 |



IMPORTANT: All replacement hydraulic hoses and fittings must have a minimum rated working pressure of 4000 psi.

***NOTE:** When ordering new Grapples you must also order the appropriate hose kit. The new Grapples will not automatically ship with hoses.

Carrier Specifications:
 lift capacities Utility Construction
 operating weight <4,000 lbs <5,000 lbs
 <6,500 lbs <9,500 lbs

Hose Kit Part Numbers

| 60" | 80" | 88" |
|--------------|--------------|--------------|
| MTG1113-0022 | MTG1113-0903 | MTG1113-9783 |

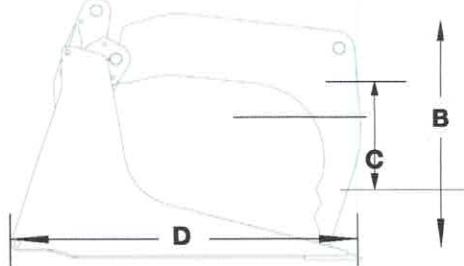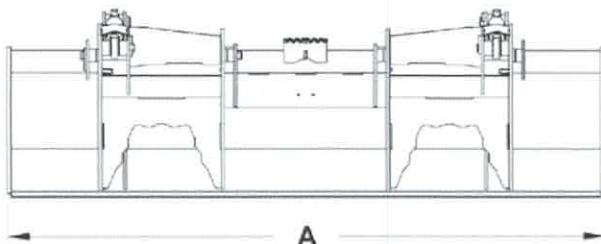


SCRAP GRAPPLES

MODEL 120 SCRAP GRAPPLES

For Skid-Steer Loaders and Compact Tool Carriers

- Optional cylinder guards protect all cylinder components
- 1½" x 8-5/8" heat-treated, greasable pivot pins on full feature
- 1½" x 27-1/8" patented grapple pins reduce torsional force
- 3/8" end plates
- Patented cushioned & sleeved cylinders are 2½" x 8" x 1¾" on full feature
- Bucket edge drilled for FFC® replaceable edge unless specified
- Optional ¾" x 8" double beveled edge



| SPECIFICATIONS | UTILITY SCRAP GRAPPLE | | | | CONSTRUCTION SCRAP GRAPPLE | | | |
|------------------------------------|-----------------------|----------|----------|----------|----------------------------|----------|----------|----------|
| | LAF5273 | LAF5278 | LAF5282 | LAF5287 | LAF5073 | LAF5078 | LAF5082 | LAF5087 |
| A. Width | 74" | 79" | 83" | 88" | 74" | 79" | 83" | 88" |
| B. Overall Height - Grapple Open | 45.4" | 45.4" | 45.4" | 45.4" | 45.4" | 45.4" | 45.4" | 45.4" |
| C. Overall Height - Grapple Closed | 19.1" | 19.1" | 19.1" | 19.1" | 19.1" | 19.1" | 19.1" | 19.1" |
| D. Overall Depth | 37.8" | 37.8" | 37.8" | 37.8" | 37.8" | 37.8" | 37.8" | 37.8" |
| Weight | 1303 lbs | 1514 lbs | 1542 lbs | 1571 lbs | 1266 lbs | 1301 lbs | 1329 lbs | 1364 lbs |

IMPORTANT: All replacement hydraulic hoses and fittings must have a minimum rated working pressure of 4000 psi.

**NOTE: When ordering new Grapples you must also order the appropriate hose kit. The new Grapples will not automatically ship with hoses.*

| Carrier Specifications: | Utility | Construction |
|-------------------------|------------|--------------|
| lift capacities | <4,000 lbs | <5,000 lbs |
| operating weight | <6,500 lbs | <9,500 lbs |

| OPTIONS | ORDER CODE | WEIGHT |
|--|------------|--------|
| Hardened Pin Kit for Model 120 | LAF5003 | 45 |
| Cylinder/Hose Guard Kit for Model 120 | LAF5004 | 57 |
| End Plate Extension - Full Kit for Model 120 | LAF5250 | NA |

MODEL 130 SCRAP GRAPPLES

For Telehandlers, Wheel Loaders and Backhoe Loaders

- Optional cylinder guards protect all cylinder components
- 1½" x 8-5/8" heat-treated, greasable pivot pins
- 1½" x 27-1/8" patented grapple pins reduce torsional force
- Patented cushioned & sleeved cylinders are 2 ½" x 8" x 1 ¾"
- Bucket edge drilled for FFC replaceable edge unless specified
- Optional ¾" x 8" double beveled edge

| Carrier Specifications: | |
|-------------------------|-------------|
| lift capacities | <9,000 lbs |
| operating weight | <11,000 lbs |

| SPECIFICATIONS | LAF5283 | LAF5294 |
|----------------------------------|----------|----------|
| A. Width | 83" | 94" |
| B. Overall Height Grapple Open | 47.4" | 47.4" |
| C. Overall Height Grapple Closed | 21.8" | 21.5" |
| D. Overall Depth | 37.3" | 37.3" |
| Weight | 1665 lbs | 1745 lbs |

IMPORTANT: All replacement hydraulic hoses and fittings must have a minimum rated working pressure of 4000 psi.

| OPTIONS | ORDER CODE | WEIGHT |
|--|------------|--------|
| End Plate Extension - Full Kit for Model 120 | LAF5252 | 50 |